

Bifacial Double Glass Module (Black Frame)

DAS-DH108NE

480W~505W




Key Features

- High Efficiency**
 Leading module efficiency in industry, up to 22.7%
- Excellent Appearance and Performance**
 Bifacial solar cell, symmetrical design, low risk of micro-crack
- High Reliability**
 Passed 3*IEC standard test, 15 years materials warranty, 30 years power warranty
- Excellent Rear Side Power Generation**
 Bifaciality is up to 80%, up to 30% more energy yield than conventional modules
- Better low irradiance performance**
 Higher power output even under low irradiance environments like on cloudy or foggy days
- Extensive Application Scenes**
 More extensive application scenes, such as BIPV, snow field, vertical installation, high humidity, strong wind and desert region

Maximum Power Output	Maximum Module Efficiency	Power Output Tolerance
505W	22.7%	0~+5W

Product and Quality Certifications


- IEC 61215, IEC 61730
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- ISO 45001: Occupational Health and Safety Management System
- IEC 62716, IEC 61701: Ammonia, Salt mist corrosion test
- IEC TS 62804-1, IEC 60068-2-68: PID test, Dust and Sand test

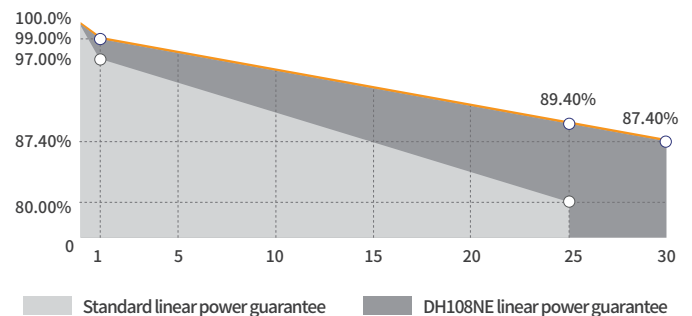



Leading product and power warranty

-1.00% 1st-year Degradation **-0.40%** Annual Degradation **15** Materials and workmanship warranty **30** Linear power warranty

Engineering Drawing (mm)

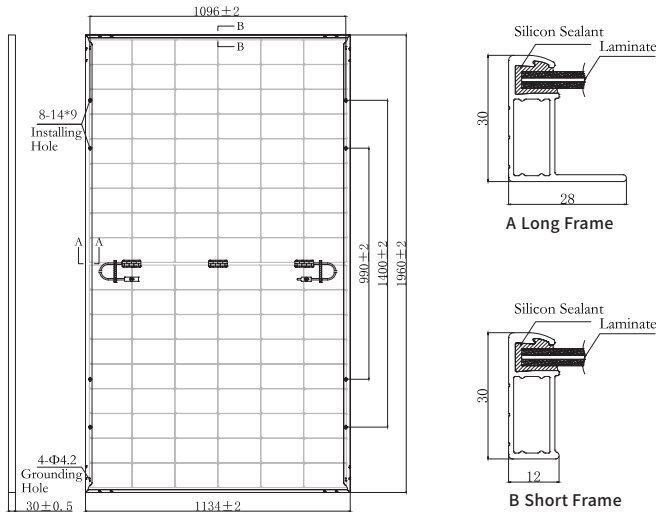

Characteristic Curves(500W)

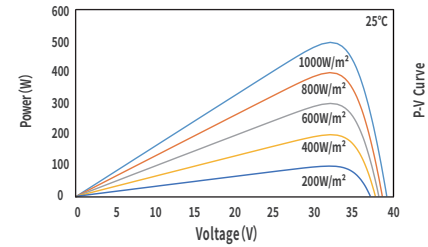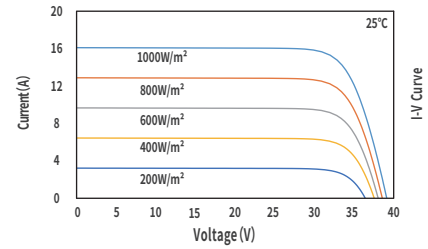

Electrical Parameters (STC *)

Nominal Max. Power(Pmax/W)	480	485	490	495	500	505
Open Circuit Voltage(Voc/V)	38.99	39.16	39.33	39.52	39.70	39.88
Short Circuit Current(Isc/A)	15.77	15.84	15.91	15.98	16.05	16.11
Operating Voltage(Vmp/V)	32.77	32.95	33.14	33.32	33.50	33.67
Operating Current(Imp/A)	14.65	14.72	14.79	14.86	14.93	15.00
Efficiency(%)	21.6	21.8	22.0	22.3	22.5	22.7

STC *: Irradiance = 1000 W/m², Cell Temperature = 25°C, AM = 1.5
Test condition is based on the front side

Mechanical Parameters

Cell Type	N Type
Module Size	1960 × 1134 × 30mm
Glass Thickness	2.0mm + 2.0mm
Module Weight	27.5Kg
Output Cable	4mm ² , cable length +400mm/-200mm (can be customized)
Connector	MC4 Series
Junction Box	IP68, 3 bypass diodes
Frame	Anodized aluminium alloy (Black)

Electrical Parameters (NMOT *)

Nominal Max. Power(Pmax/W)	366	370	373	377	381	385
Open Circuit Voltage(Voc/V)	37.33	37.50	37.66	37.84	38.01	38.19
Short Circuit Current(Isc/A)	12.71	12.77	12.83	12.88	12.94	12.99
Operating Voltage(Vmp/V)	30.97	31.14	31.31	31.48	31.65	31.82
Operating Current(Imp/A)	11.81	11.87	11.92	11.98	12.04	12.09

NMOT *: Irradiance = 800 W/m², Ambient Temperature = 20°C, AM = 1.5,
Wind Speed = 1 m/s
Test condition is based on the front side

Temperature Coefficients

Short Circuit Current(Isc)	+0.045%/°C
Open Circuit Voltage(Voc)	-0.250%/°C
Nominal Max. Power(Pmax)	-0.280%/°C
NMOT	42 ± 2°C

Backside Power Gain (For 500W)

Power Gain	10%	15%	20%	25%	30%
Nominal Max. Power(Pmax/W)	550.0	575.0	600.0	625.0	650.0
Open Circuit Voltage(Voc/V)	39.70	39.70	39.80	39.80	39.80
Short Circuit Current(Isc/A)	17.66	18.46	19.26	20.06	20.87
Operating Voltage(Vmp/V)	33.50	33.50	33.60	33.60	33.60
Operating Current(Imp/A)	16.42	17.16	17.86	18.60	19.35

Operating Parameters

Max. System Voltage	DC1500V
Power Tolerance	0 ~ +5 W
Operating Temperature	-40°C ~ +85°C
Max. Fuse Rated Current	30A
Static Load	Front 5400Pa, Back 2400Pa
Packing Data	36 pcs/Pallet; 180(20GP); 792(40HQ)