




ASTRONERGY

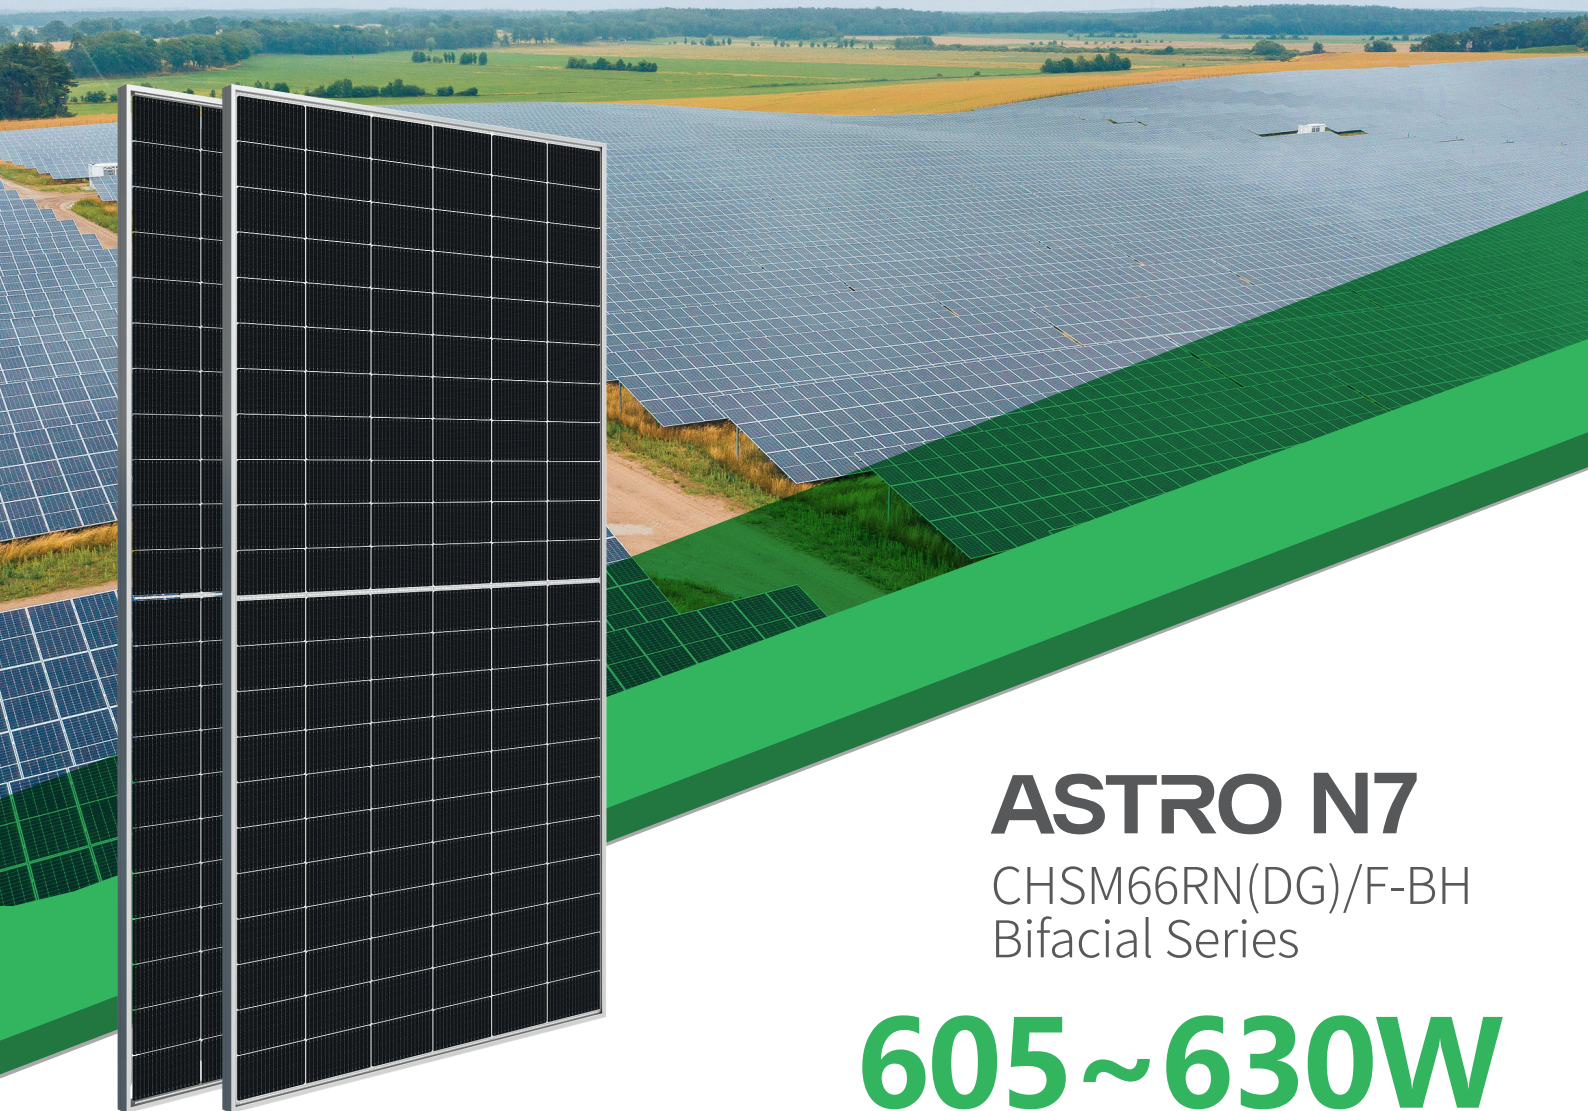

ASTRO N7


CHSM66RN(DG)/F-BH
Bifacial Series

605~630W



Warranty

- 15** 15-year Product Warranty
- 30** 30-year Linear Power Warranty

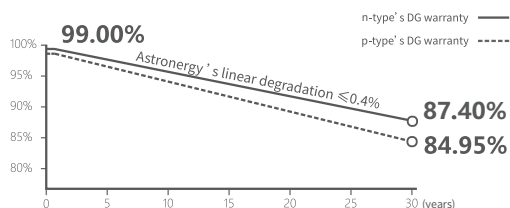

- TOPCon 4.0**
n-type TOPCon 4.0
Novel upgrade, enhancing module efficiency
- SMBB Design**
Enhancing current collection, minimizing power loss
- Low Voc Design**
Increasing modules per string, lower BOS cost
- Bifacial Power Generation**
Maximizing bifaciality, boosting backside power output

605~630W

POWER RANGE

0~+3%


POWER SORTING

23.3%MAX MODULE
EFFICIENCY**≤ 1.0%**FIRST YEAR
POWER DEGRADATION**≤ 0.4%**YEAR 2-30
POWER DEGRADATION

Mechanical Specifications

Outer dimensions (L x W x H)	2382 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	132 (6*22)
Frame technology	Aluminum, silver anodized
Front / Back glass	2.0+2.0 mm
Cable length (Including connector)	Portrait: (+)350 mm, (-)250 mm; Customized length
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Connector type (IEC/UL)	HCB40 (Standard) / MC4-EVO2A (Optional)
Module weight	32.8 kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	1231 kg
Modules per 40' HQ container	612 pcs (Subject to sales contract)

① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

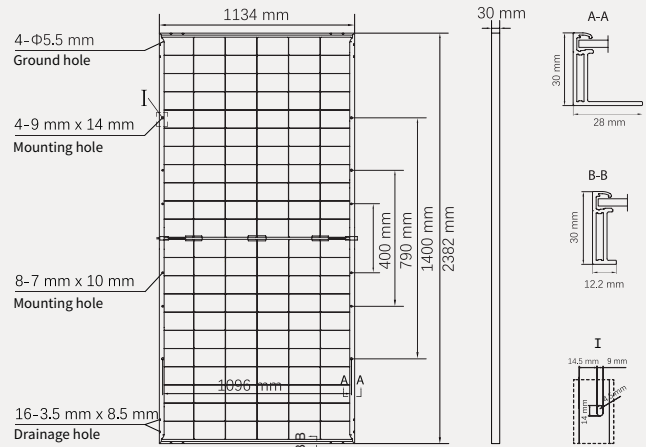

Electrical Specifications

STC: Irradiance 1000W/m², Cell Temperature 25° C, AM=1.5

	605	610	615	620	625	630
Rated output (Pmpp / Wp)	605	610	615	620	625	630
Rated voltage (Vmpp / V)	41.18	41.31	41.43	41.56	41.69	41.82
Rated current (Impp / A)	14.69	14.77	14.84	14.92	14.99	15.07
Open circuit voltage (Voc / V)	48.59	48.74	48.89	49.04	49.19	49.34
Short circuit current (Isc / A)	15.86	15.94	16.02	16.11	16.19	16.27
Module efficiency	22.4%	22.6%	22.8%	23.0%	23.1%	23.3%

BNPI: Irradiance: front 1000W/m², rear 135W/m², Cell Temperature 25° C, AM=1.5

	665	670	675	680	685	690
Rated output (Pmpp / Wp)	665	670	675	680	685	690
Rated voltage (Vmpp / V)	41.00	41.13	41.25	41.37	41.49	41.61
Rated current (Impp / A)	16.22	16.29	16.36	16.44	16.51	16.58
Open circuit voltage (Voc / V)	48.79	48.94	49.09	49.14	49.19	49.24
Short circuit current (Isc / A)	17.45	17.53	17.61	17.72	17.83	17.94

Temperature Ratings (STC)


Temperature coefficient (Pmpp)	-0.29%/°C
Temperature coefficient (Isc)	+0.043%/°C
Temperature coefficient (Voc)	-0.25%/°C

Operating Parameters


Bifaciality (Pmpp)	80±5%
Junction box IP rating	IP 68
Max. series fuse rating	35 A
Max. system voltage (IEC/UL)	1500V _{DC}

Curve

Current-Voltage (615W)

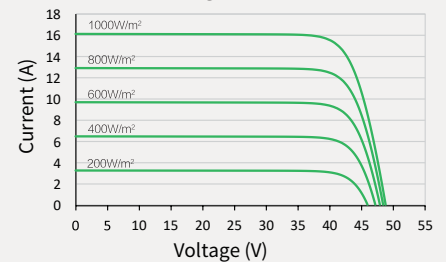

Power-Voltage (615W)

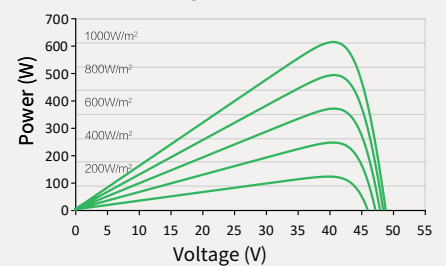

Current-Voltage (615W)

