



ASTRONERGY



# ASTRO N7s

CHSM54RNs(DG)/F-BH  
Bifacial Series


# 445~465W



## Warranty

**25** 25-year Product Warranty

**30** 30-year Linear Power Warranty

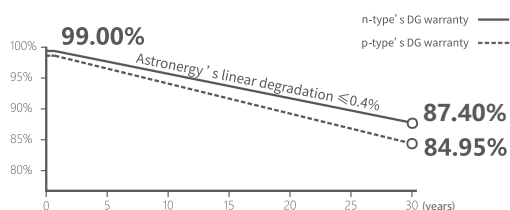

### n-type TOPCon 4.0

Novel upgrade, enhancing module efficiency



### ZBB-TF (Tiling Film)

Zero-busbar integrated interconnection



### Sleek Design

≤ 2 m<sup>2</sup> area, easy to transport and install



### Integrated Appearance

Streamlined design without busbars or harpoon-like ribbons, perfect for upscale zero-carbon buildings



IEC 61215, IEC 61730  
ISO 9001:2015:ISO Quality Management System  
ISO 14001:2015:ISO Environment Management System  
ISO 45001:Occupational Health and Safety  
The first solar company which passed the Nord IEC/TS 62941 certification audit



Tier 1  
BloombergNEF



# 445~465W

POWER RANGE

# 0~+3%

POWER SORTING

# 23.3%

MAX MODULE EFFICIENCY

# ≤ 1.0%

FIRST YEAR POWER DEGRADATION


# ≤ 0.4%

YEAR 2-30 POWER DEGRADATION

## Mechanical Specifications

Outer dimensions (L x W x H)	1762 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	108 (6*18)
Frame technology	Aluminum, black or silver anodized
Front / Back glass	2.0+2.0 mm
Cable length (Including connector)	Portrait: (+)350 mm, (-)250 mm; Customized length
Cable diameter (IEC/UL)	4 mm <sup>2</sup> / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Connector type (IEC/UL)	HCB40 (Standard) / MC4-EVO2A (Optional)
Module weight	24.4 kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	927 kg
Modules per 40' HQ container	828 pcs (Subject to sales contract)

① Refer to Astronergy crystalline installation manual or contact technical department.  
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

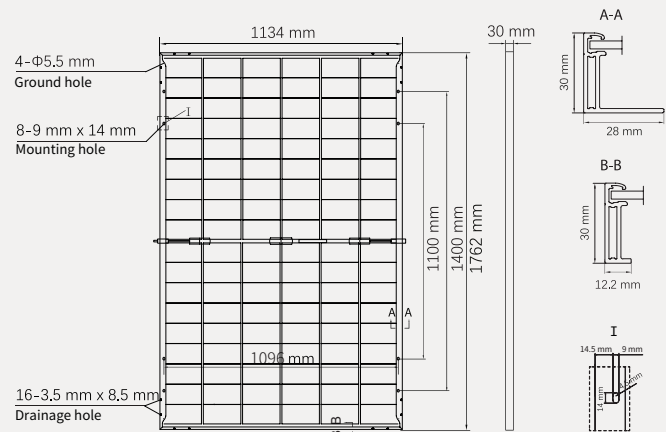

## Electrical Specifications

**STC:** Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25° C, AM=1.5

	445	450	455	460	465
Rated output (Pmpp / Wp)					
Rated voltage (Vmpp / V)	32.77	32.94	33.11	33.28	33.45
Rated current (Impp / A)	13.58	13.66	13.74	13.82	13.90
Open circuit voltage (Voc / V)	39.00	39.20	39.40	39.60	39.80
Short circuit current (Isc / A)	14.26	14.35	14.44	14.52	14.60
Module efficiency	22.3%	22.5%	22.8%	23.0%	23.3%

**NMOT:** Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20° C, AM=1.5, Wind Speed 1m/s

	334.6	338.4	342.2	345.9	349.7
Rated output (Pmpp / Wp)					
Rated voltage (Vmpp / V)	30.85	31.01	31.16	31.32	31.48
Rated current (Impp / A)	10.85	10.91	10.98	11.04	11.11
Open circuit voltage (Voc / V)	37.04	37.23	37.42	37.61	37.80
Short circuit current (Isc / A)	11.51	11.58	11.65	11.72	11.79

## Electrical Specifications (Integrated power)

Pmpp gain	Pmpp / Wp	Vmpp / V	Impp / A	Voc / V	Isc / A
5%	478	33.39	14.31	39.40	15.16
10%	501	33.39	14.99	39.40	15.88
15%	523	33.39	15.67	39.40	16.60
20%	546	33.39	16.35	39.40	17.32
25%	569	33.39	17.03	39.40	18.04

Electrical characteristics with different rear power gain (reference to 455W)

## Temperature Ratings (STC)

## Operating Parameters

Temperature coefficient (Pmpp)	-0.29%/°C	No. of diodes	3
Temperature coefficient (Isc)	+0.043%/°C	Junction box IP rating	IP 68
Temperature coefficient (Voc)	-0.25%/°C	Max. series fuse rating	30 A
Nominal module operating temperature (NMOT)	41±2°C	Max. system voltage (IEC/UL)	1500V <sub>DC</sub>

## Curve

